

2 CR123

FORTEM™ HELMET LIGHT

FORTEM™ XPP-5466R



NEW 360° MOUNT

Positions light **at any angle** and **holds firm**.

CERTIFIED
INTRINSICALLY
SAFE
CLASS I DIV 1



Provides **maximum versatility and safety**.

DUAL-LIGHT

POWERFUL SPOTLIGHT AND 45° FLOODLIGHT



The durable **integrated brim mount** clamps securely to nearly all helmets.



360-degree mount provides user infinite aiming options, as well as clearance for external shields.



Helmet clamp features **no-mar rubber foot** for robust grip and peace of mind.



Large spotlight and floodlight buttons are **designed to be activated with gloved hand**.

250 LUMENS



1-800-233-2155 · 1-469-326-9400 · nightstick.com

© 2019 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

FORTEM™**DUAL-LIGHT™ HELMET LIGHT****2 CR123****ITEM NUMBER/UPC**

XPP-5466R - 017398805940

CERTIFICATIONS

- CE
- cULus
- NFPA 1971-8.6 (2013)

CASE MATERIAL

- 6061-T6 aluminum

LUMENS/RUNTIME**SPOTLIGHT**

- HIGH: 250L, 3.5 hrs. runtime
- MEDIUM: 100L, 6.5 hrs. runtime
- LOW (SURVIVALMODE) 25L: 16 hrs. runtime

FLOODLIGHT

- HIGH: 115L, 3.5 hrs. runtime
- MEDIUM: 50L, 6.5 hrs. runtime
- LOW (SURVIVAL MODE) 10L: 16 hrs. runtime

DUAL-LIGHT

- 150L, 3.5 hrs. runtime

CANDELA

- HIGH: 10,335
- MEDIUM: 3,975
- LOW: 1,021

BEAM DISTANCE**SPOTLIGHT**

- HIGH: 203m
- MEDIUM: 126m
- LOW: 64m

WATER RATING

- IP-67 (waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 3.2 in (81mm)
- WIDTH: 1.4 in (36mm)
- DEPTH: 3.2 in (81mm)
- BEZEL DIAMETER: 1.1 in (28mm)
- WEIGHT: 7.2 oz (204g)

BATTERY






- 2 CR123 batteries (included)

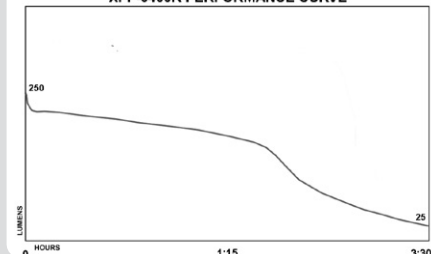
WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

- Helmet Light
- 2 CR123 batteries

FL 1 STANDARD	HIGH	MEDIUM	LOW
	250 LUMENS	100 LUMENS	25 LUMENS
	3h 30min	6h 30min	16h
	203m	126m	64m
	10,335cd	3,975cd	1,021cd
	2m		1m

XPP-5466R PERFORMANCE CURVE

E 467756

INTRINSICALLY SAFE
SECURITE INTRINSEQUE

Bayco Products, Inc.

XPP-5466

ID 4001184



CLASS I DIV 1 GRPS A-D T4
 CLASS II & III DIV 1 GRPS E-G T135°C
 CLASS I ZONE 1 AEx ia IIC T4 Ga
 CLASS I ZONE 1 Ex ia IIC T4
 -20°C ≤ Tamb ≤ +40°C
 3.0V/Cell / Energizer 123

SEE INSTRUCTION MANUAL
VOIR MANUEL

CERTIFIED



NFPA

